


NO.	NOTES																				
1	COLOR CODE : <div><div>BK — BLACK W — WHITE R — RED G — GREEN O — ORANGE</div><div>BL — BLUE Y — YELLOW BR — BROWN P — PURPLE S — SLATE</div></div>																				
2	——X DENOTES SPLICED, SOLDERED, AND TAPED WIRES.																				
3	COMPONENTS SHOWN DOTTED ARE ACCESSORIES TO CABINET.																				
4	USE POWER AND SIGNAL LINE INTERFERENCE SUPPRESSORS FOR INSTALLATIONS REQUIRING MINIMUM R.F. INTERFERENCE. FOR OTHER INSTALLATIONS, OMIT SUPPRESSORS AND CONNECT INPUTS DIRECTLY TO TERMINALS SHOWN.																				
5	<p>CABINET POWER CIRCUIT WIRED FOR 115V. D.C. OPERATION. CONNECT GROUNDED SIDE OF INPUT POWER, OR NEGATIVE SIDE OF UNGROUNDED POWER TO TERMINAL C40 OR THROUGH THIS SIDE OF FILTER. POLARITIES SHOWN (+) AND (−) ARE FOR NEGATIVE GROUNDED POWER. THE ASSOCIATED ELECTRICAL SERVICE UNIT MUST BE WIRED FOR D.C. OPERATION.</p> <p>SELECT THE DESIRED OPERATING CONDITIONS FROM THE FOLLOWING TABLE AND MAKE CONNECTIONS AT THE CABINET TERMINAL BLOCKS WITH THE TWO 153483 STRAPS FURNISHED WITH THE 152624 A.C. TO D.C. ASSEMBLY :</p> <p style="text-align: center;">SIGNAL LINE CIRCUIT ACCESSORY OPERATION.</p> <table><tr><td></td><td>OPERATES CONTINUOUSLY</td><td>OPERATES WITH POWER SWITCH</td><td>OPERATES WITH MOTOR CONTROL</td></tr><tr><td rowspan="2">POWER SOURCE</td><td>NEGATIVE GROUND OR UNGROUNDED</td><td>C 21 — C 38 C 22 — C 40</td><td>C 21 — C 35 C 22 — C 40</td></tr><tr><td>POSITIVE GROUND</td><td>C 21 — C 38 C 22 — C 40</td><td>C 21 — C 37 C 22 — C 40</td></tr></table> <p>SEE APPROPRIATE ELECTRICAL SERVICE UNIT SCHEMATIC WIRING DIAGRAM.</p>		OPERATES CONTINUOUSLY	OPERATES WITH POWER SWITCH	OPERATES WITH MOTOR CONTROL	POWER SOURCE	NEGATIVE GROUND OR UNGROUNDED	C 21 — C 38 C 22 — C 40	C 21 — C 35 C 22 — C 40	POSITIVE GROUND	C 21 — C 38 C 22 — C 40	C 21 — C 37 C 22 — C 40									
	OPERATES CONTINUOUSLY	OPERATES WITH POWER SWITCH	OPERATES WITH MOTOR CONTROL																		
POWER SOURCE	NEGATIVE GROUND OR UNGROUNDED	C 21 — C 38 C 22 — C 40	C 21 — C 35 C 22 — C 40																		
	POSITIVE GROUND	C 21 — C 38 C 22 — C 40	C 21 — C 37 C 22 — C 40																		
6	NECESSARY STRAP CONNECTIONS AT THE CABINET TERMINAL BLOCKS ARE SHOWN ON THE ASSOCIATED ELECTRICAL SERVICE UNIT WIRING DIAGRAM. SEE THE LESU7 ACCESSORY GROUP B.M. FOR THE DIAGRAM NUMBER.																				
7	<p style="text-align: center;">ACCESSORY GROUP ASSIGNMENTS</p> <table><tr><th>ACCESSORY GROUP NO.</th><th>COPYLIGHT SYSTEM</th><th>MARGIN IND. LAMP</th><th>SIGNAL BELL</th><th>ELEC. NOISE SUPPRESSORS</th></tr><tr><td>130,150,240,241</td><td>X</td><td>X</td><td>X</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr></table>	ACCESSORY GROUP NO.	COPYLIGHT SYSTEM	MARGIN IND. LAMP	SIGNAL BELL	ELEC. NOISE SUPPRESSORS	130,150,240,241	X	X	X											
ACCESSORY GROUP NO.	COPYLIGHT SYSTEM	MARGIN IND. LAMP	SIGNAL BELL	ELEC. NOISE SUPPRESSORS																	
130,150,240,241	X	X	X																		
8	GROUND SCREW IS LOCATED AT REAR OF CABINET, ADJACENT TO RIGHT HINGE.																				

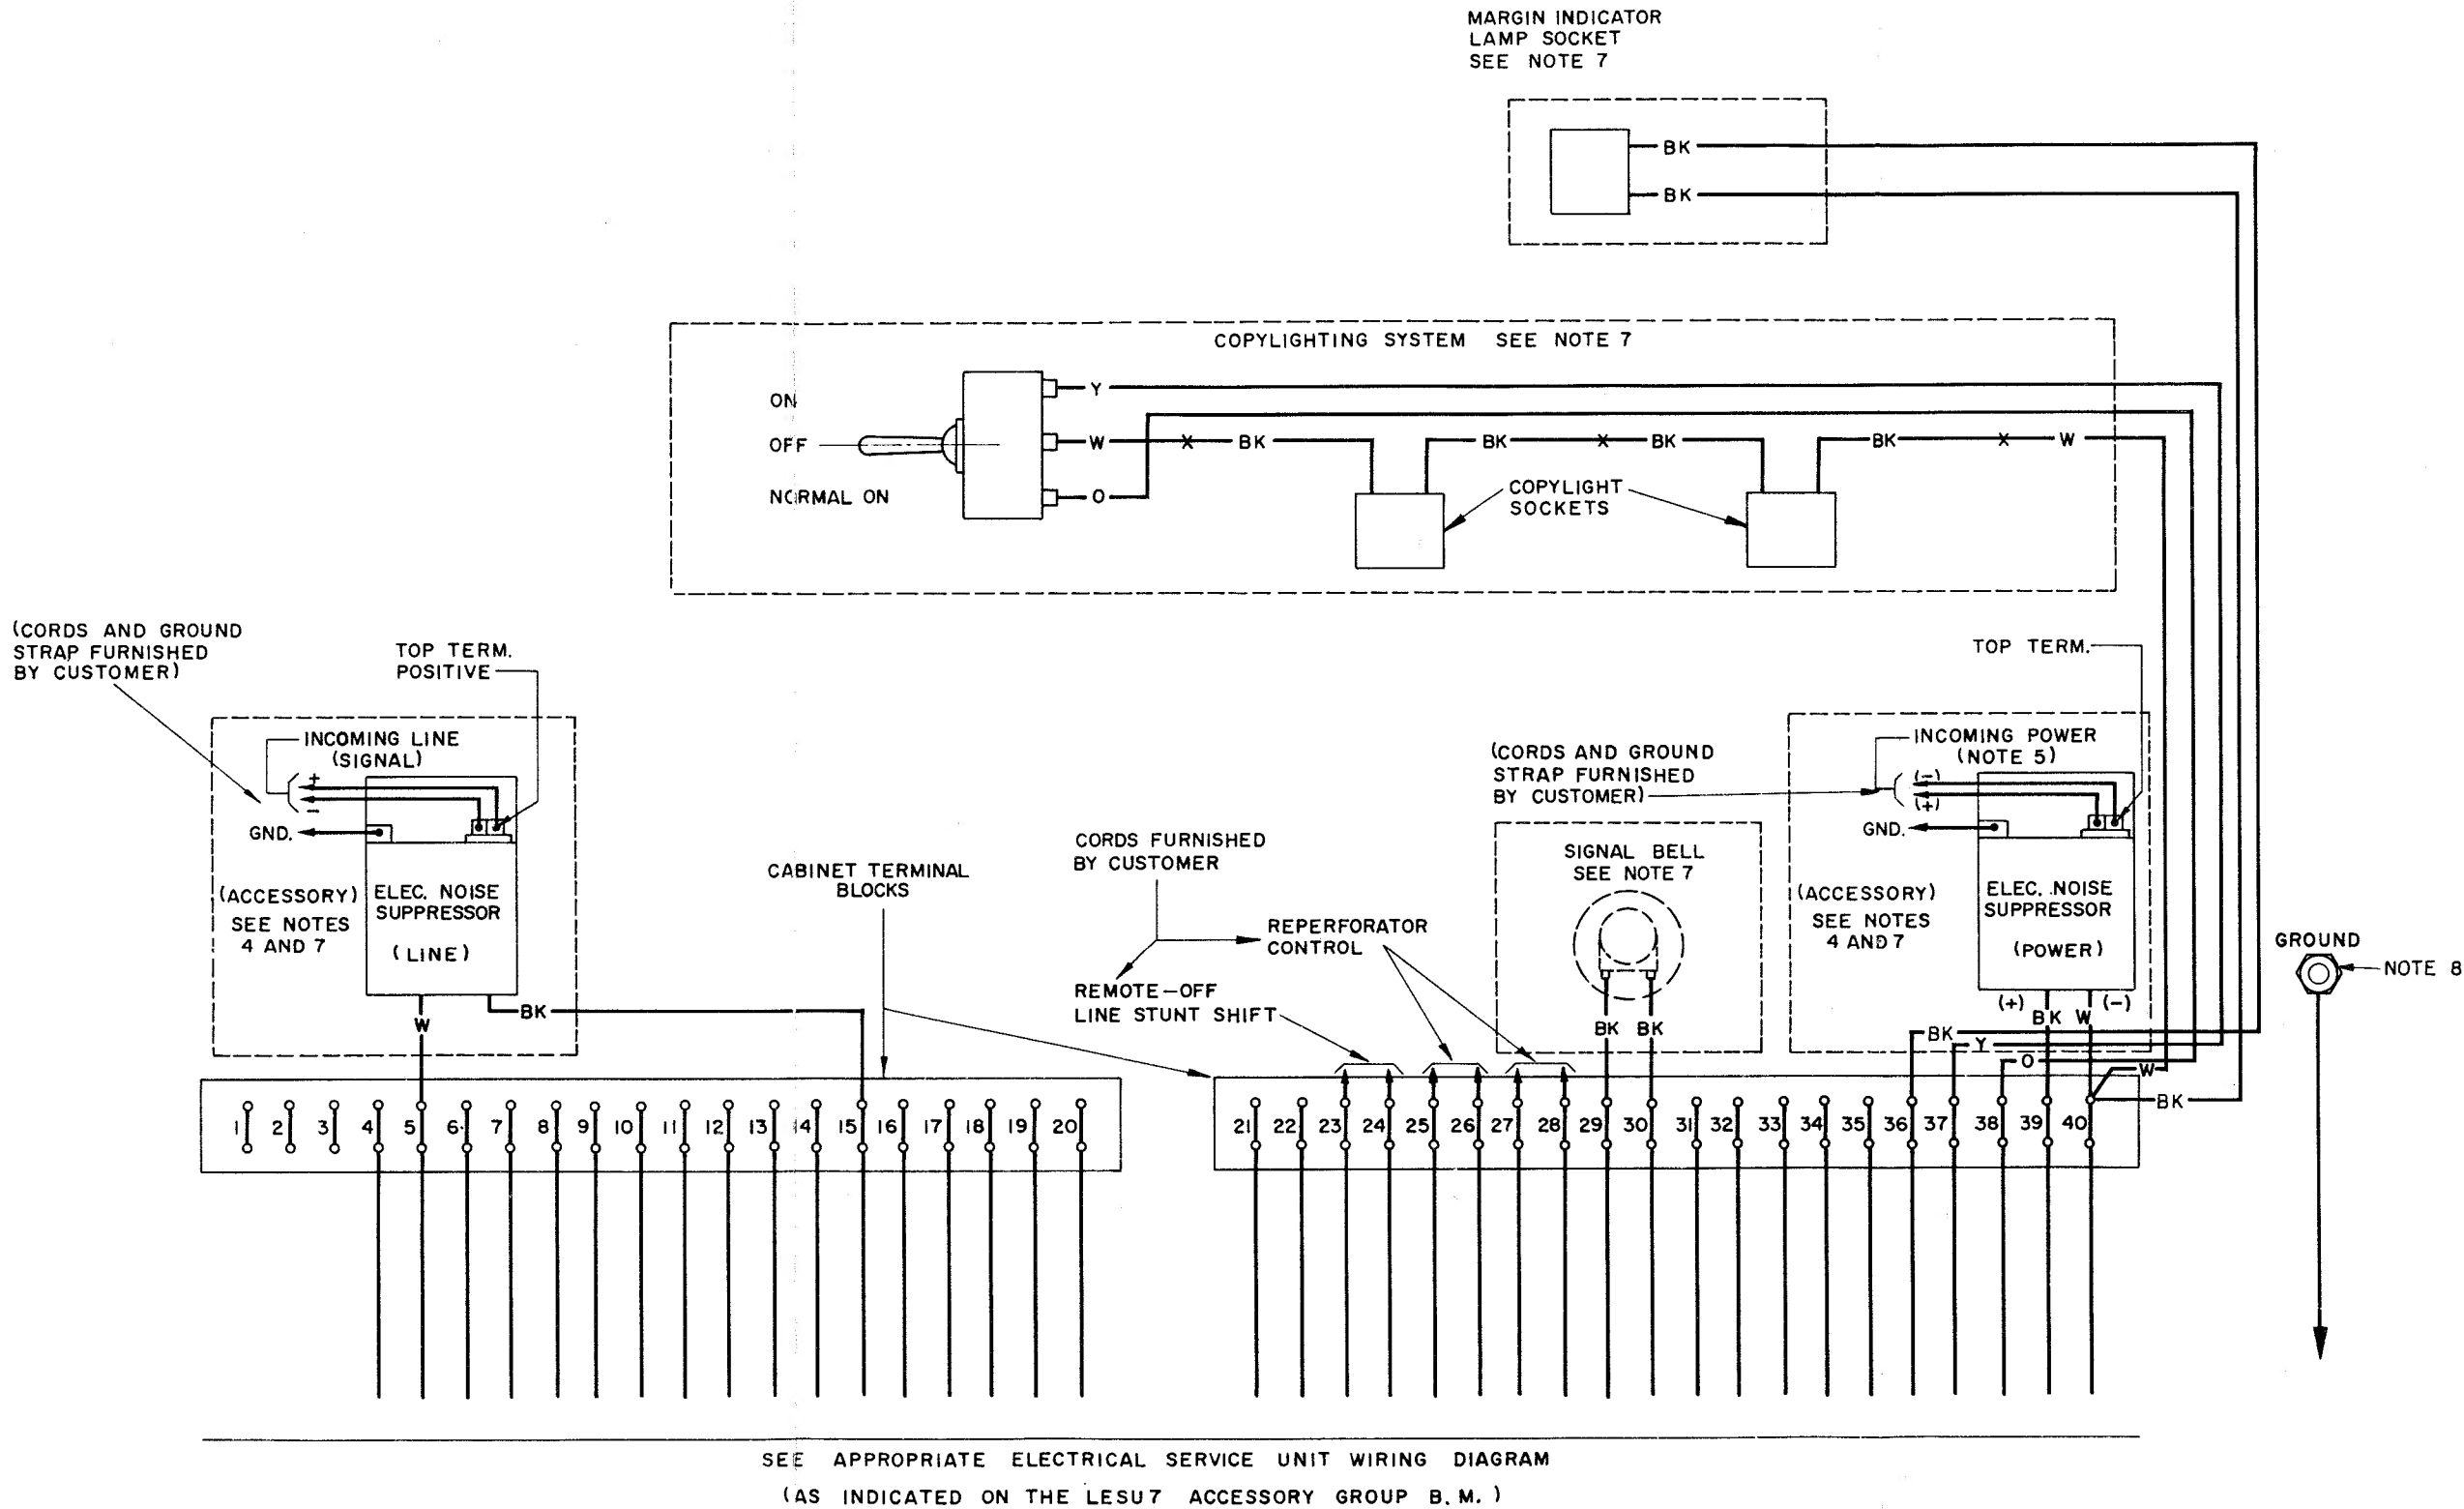

2876 WD		
REVISIONS		
ISSUE	DATE	AUTH. NO.
G	12-30-56	28-7216
H	12-5-57	28-8154
J	12-17-57	28-8195
K	3-25-59	28-10913
L	5-22-59	28-11141

ACTUAL WIRING DIAGRAM FOR MODEL 28 PRINTER CABINET LAC 203,204,205	
ACCESSORY GROUPS 130,150,240,241 (FOR D.C. APPLICATION)	
DATE: 4-20-54	
RD. FILE NO.: 2-30.65.156A	
DRAWN: N.K.G. CHKD. R.D.	
ENG'D: G.A.O. APP'D:	
TELETYPE CORPORATION	
2876 WD	

FOR SCHEMATIC SEE ASSOCIATED LESU WD